


TABLEWARE SPECIAL KILN

SPEZIALÖFEN
HORNO ESPECIAL



RIEDHAMMER


TBS

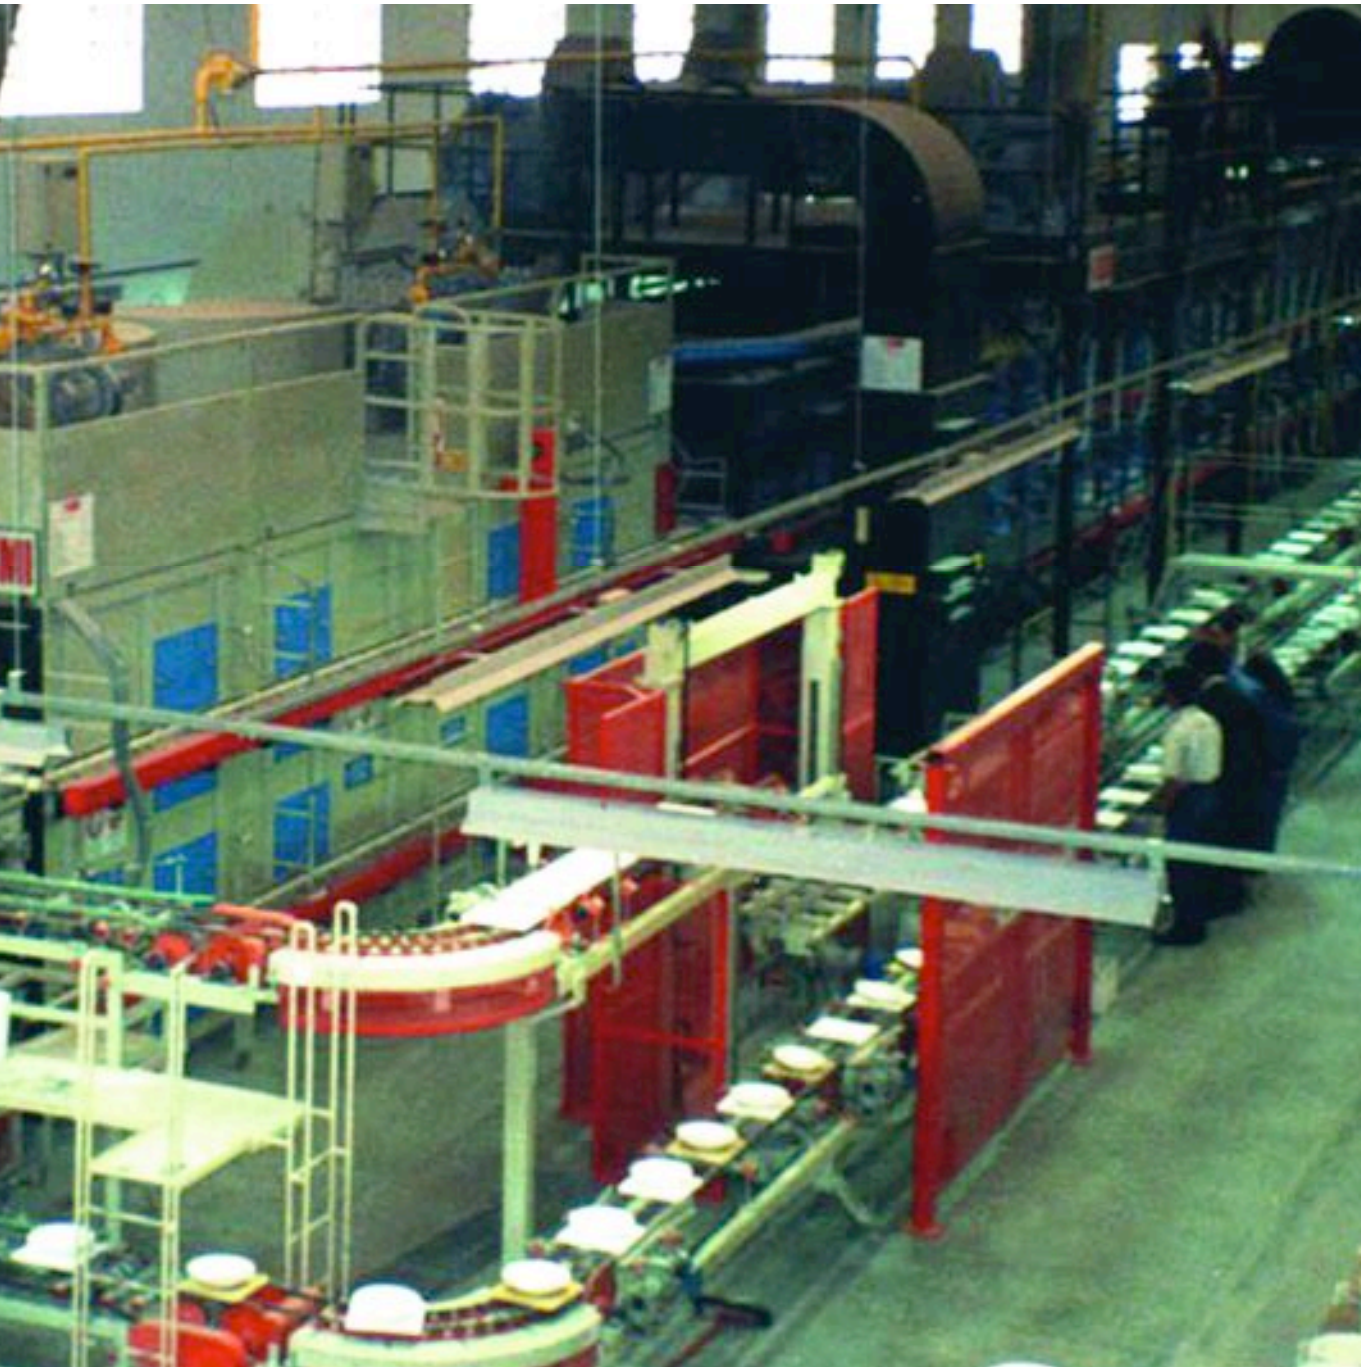

DOUBLE CHANNEL ROLLER KILN (TBS)

DOPPELKANALROLLENOFEN (TBS)

HORNO DE RODILLOS BICANAL (TBS)

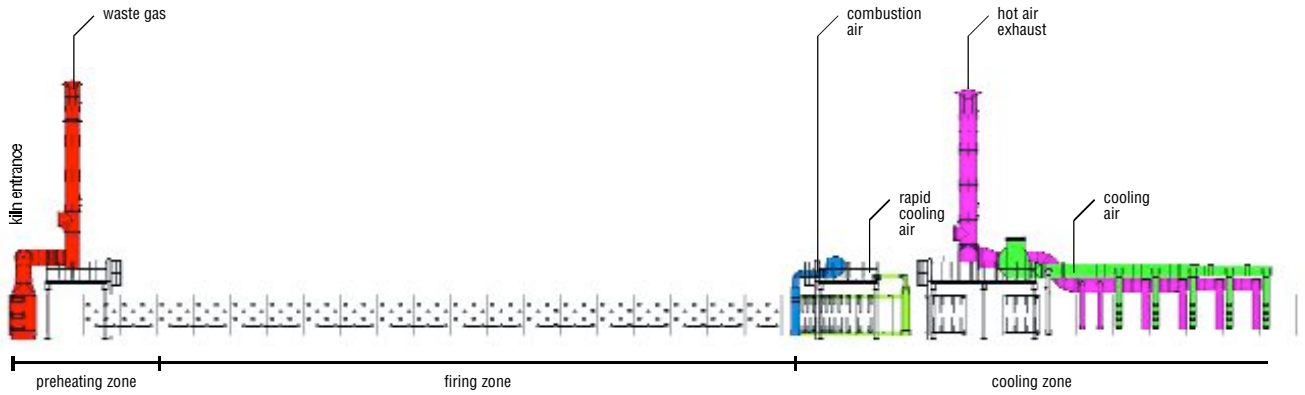

Double channel roller kiln for biscuit firing.

Doppelkanalrollenofen für den Biskuitbrand

Horno de rodillos bicanal para la cocción de bizcocho para vajillas



TECHNICAL DATA	TECHNISCHE DATEN	DATOS TÉCNICOS	
Application	Anwendung	Aplicación	Biscuit firing – double channels
Kiln possible dimensions	Mögliche Ofenmaße	Posibles dimensiones del horno	48.3 ÷ 86.1 m
Useful width	Nutzbreite	Anchura útil	2160 mm
Possible kiln loading height	Mögliche Ladehöhe d. Wagen	Posible altura de carga del horno	up to 300 mm
Slab possible useful area	Mögliches Nutzvolumen d. Brennplatte	Posible área útil para las placas de quemadores	0.10 ÷ 0.37 m ²
Slabs in width	Plattenbreite	Anchura de las placas de quemadores	2 ÷ 6
Average load (depending on products mix and loading conditions)	Durchschn. Beladung (abhängig vom Produkt und Ladebedingungen)	Carga media (depende de la mezcla de productos y de las condiciones de carga)	5 ÷ 18 Kg/m ²
Maximum temperature	Maximaltemperatur	Temperatura máxima	1300 °C
Firing temperature	Brenntemperatur	Temperatura de cocción	1000 ÷ 1250 °C
Approximate firing cycle	Brennzyklus (ca.)	Ciclo de cocción aproximado	1.5 ÷ 4 h
Approximate specific net consumption (depending on technological and firing cycle conditions)	Spezifischer Nettoverbrauch (ca.) (abhängig von verwendeter Technologie und Brennzyklus)	Consumo específico neto aproximado (depende de las condiciones tecnológicas y del ciclo de cocción)	2160 ÷ 4400 Kcal/Kg

Riedhammer GmbH Industrial kiln plants

postal address: 90332 Nürnberg - Germany / address: Klingenhofstraße 72, 90411 Nürnberg - Germany

telephone: +49.911.52180 / fax: +49.911.5218231 / e-mail: mail@riedhammer.de / web: www.riedhammer.de

a company of



www.sacmi.com